


## 4.1 - Wall Preparation

### 4- Areas to check

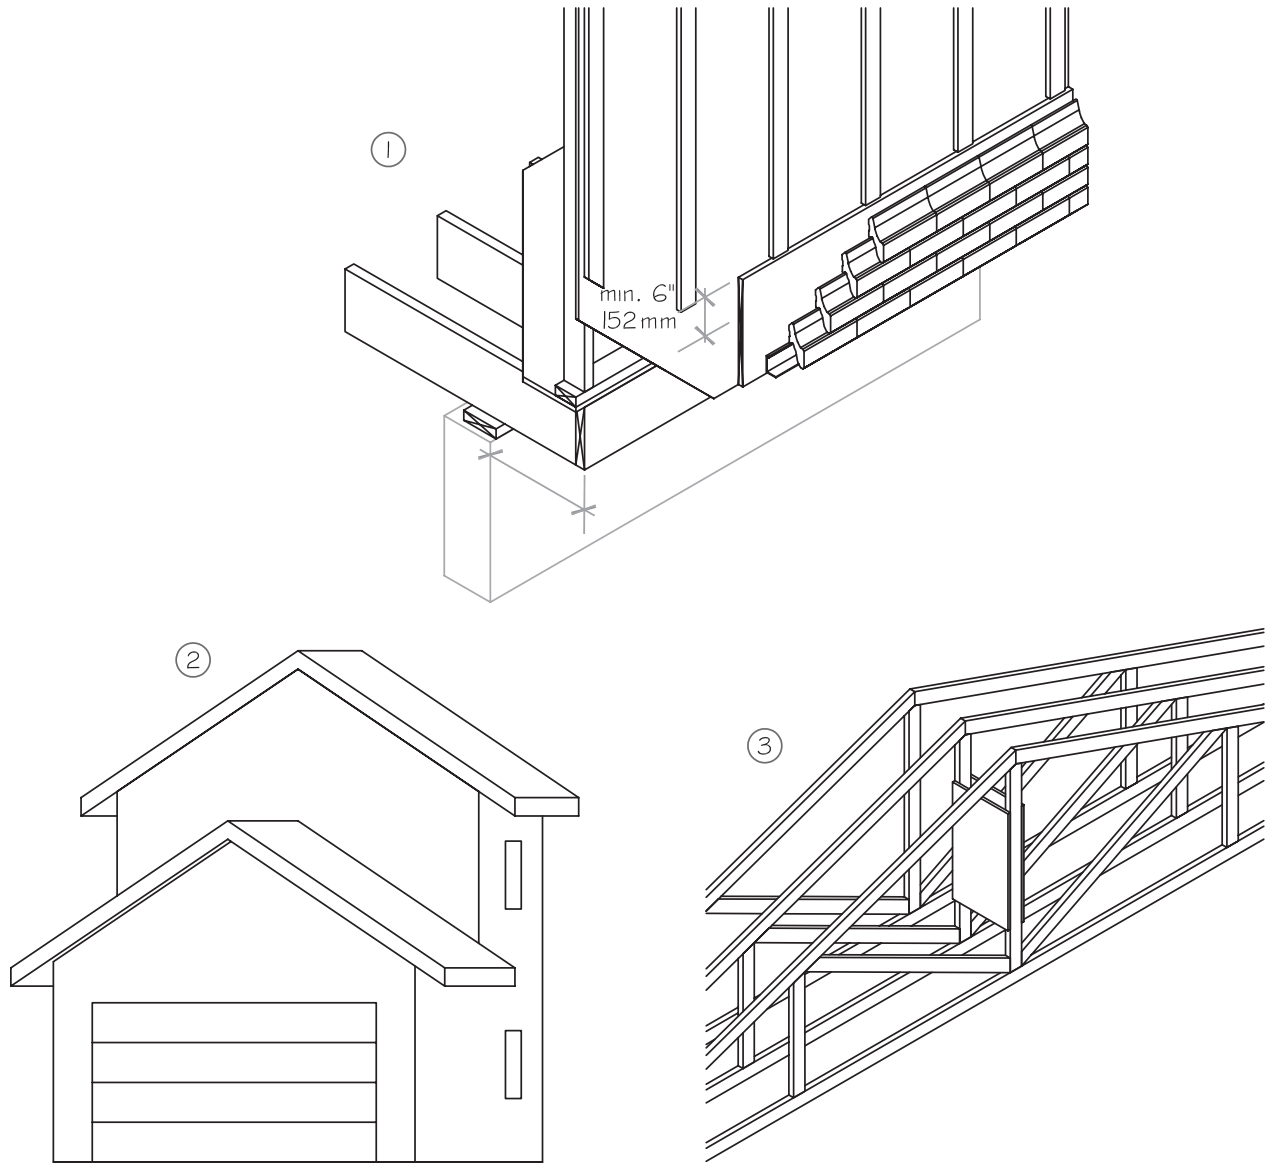

#### LEGEND:

- 1- Structural capacity of floor system supporting overhanging walls need to be checked and reinforced if necessary. Extend baseboard 6" (153mm) above floor joist to achieve maximum pull-out resistance.
- 2- Sections of walls wrapping over the top of a roof need to be checked for structural capacity.
- 3- On gables larger than 12' (305mm) replace sheathing with plywood of the same thickness. Cover with housewrap and install furring strip. Add bracing between the first and second truss in the attic space to prevent wall from racking.

